


- Kit includes:**
- Brenner torch with stand
 - 10 m 8x15 mm 20 bar rubber hose tested in accordance with European Standards EN559 with anti-kink hose spring
 - Pressure regulator - model E

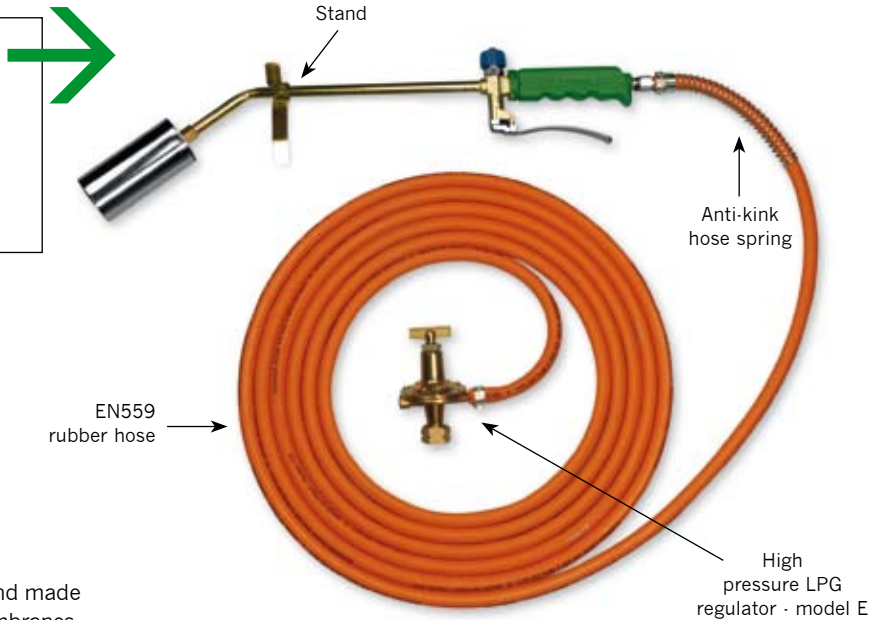

- This torch has been specifically designed and made for the application of modified bitumen membranes. It allows good performances and a good output at a competitive price. It has been designed paying the utmost attention to safety, health and environment and also taking into consideration ergonomic factors and noise levels.
- It has a lever and a main valve by which the flow of gas can be opened, cut off and regulated to the low point.
- This torch is fitted with a bell head which allows a very high output. The valves and the handwheel are made of brass and plastic. It is flame-welded with a silver-copper alloy and each part is tested carefully.
- The whole range is available both in the standard version and with optional accessories.

SPECIFICATIONS


Brenner torch			Caloric output			Max Consumption	
Head mm Ø	Stem mm	Weight gr	Kcal/h	Kw	Kj/h	Operating pressure bar	Kg/h (4bar)
50	300	611	50345	58,53	210693	2 - 4	4,200
60	300	640	62332	72,48	260858	2 - 4	5,200
70	300	707	80312	93,39	336105	2 - 4	6,700

High pressure LPG regulator - model E	
Flow capacity	10 Kg/h
Rated pressure (inlet)	16 bar
Operating pressure (outlet)	max 4 bar
Weight	280 gr
Gases to be used	propane C3 H8 - butane C4 H10



■ Brenner torch

- Brenner torch - Stem 300 mm
- Brenner torch - Stem 380 mm
- Brenner torch - Stem 480 mm
- Brenner torch - Stem 600 mm

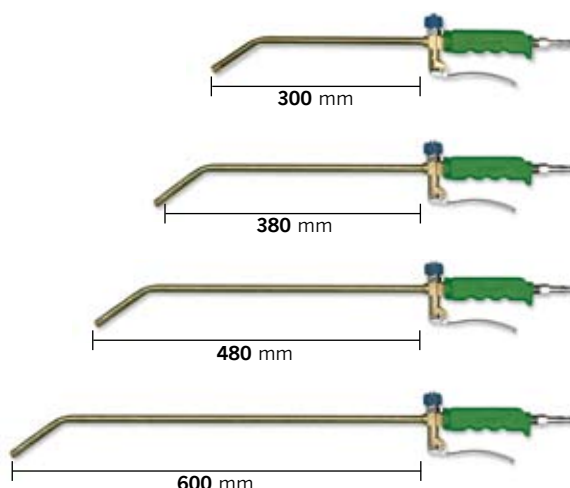

■ Bell heads

CODE

- 1014.B5** Ø 50 mm bell head
- 1014.B6** Ø 60 mm bell head
- 1014.B7** Ø 70 mm bell head



■ A. High pressure LPG regulator - model E

Code 1030.E


It is a high pressure LPG regulator adjustable from 0 to 4 bars. It is mainly made of Zn, Al, Mg, Cu alloy and it has a flow capacity of 10 Kg/h.



■ D. Anti-kink hose spring

Code 1011.MT

The anti-kink hose spring prevents the gas hose from bending and cutting at its weakest point, that is the connection with the torch. This is standard with all the models.



■ B. Stand

Code 1011.PP

This enables the torch to be placed down with the bell head facing upwards in order to avoid the contact of the flame with the surface to be heated.



■ E. Rubber hose

Code 1025.EN

8x15 mm 20 bar rubber hose, tested in accordance with European Standards EN559.



■ C. Replacement kit for Brenner flow valve

Code 1011.RK2

