




TITANIUM
torch
30% lighter

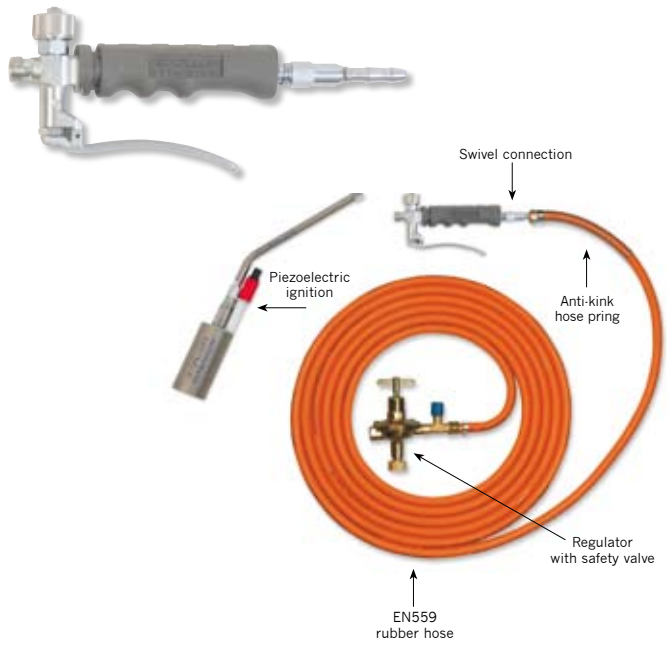

- Roofstar 2 Titanium is a torch made of ultralight **TITANIUM**. It has been designed by Calloni to lighten the hard and tiring daily work of the waterproofing professionals. In fact, since it is extremely light, it guarantees a considerable reduction of hard work, in particular for long-lasting jobs.
- Lightness, supremacy of performances, accuracy and speed, together with the possibility of customization are the main features of Roofstar 2 Titanium.

- It has a lever and a main valve by which the flow of gas can be opened, cut off and regulated to the low point.
- This model is with **INTERCHANGEABLE LANCE**.
- The whole range is available both in the standard version and with optional accessories.


SPARE PARTS AND ACCESSORIES

Bell heads

CODE

- 1014.5TA Ø 50 mm titanium bell head with piezoelectric ignition
- 1014.6TA Ø 60 mm titanium bell head with piezoelectric ignition
- 1014.5DTA 2 x Ø 50 mm titanium double bell head with piezoelectric ignition
- 1014.5T Ø 50 mm titanium bell head
- 1014.6T Ø 60 mm titanium bell head
- 1014.5DT 2 x Ø 50 mm titanium double bell head

WITH PIEZOELECTRIC IGNITION



WITHOUT PIEZOELECTRIC IGNITION



Roofstar 2 Titanium Torch

Handle

CODE


- IRTI Roofstar 2 Titanium handle
- IRTIG Roofstar 2 Titanium handle with swivel connection



Lance (without head)

CODE

- LRTI12 Roofstar 2 Titanium Lance - Stem 120mm
- LRTI18 Roofstar 2 Titanium Lance - Stem 180 mm
- LRTI22 Roofstar 2 Titanium Lance - Stem 220 mm
- LRTI38 Roofstar 2 Titanium Lance - Stem 380 mm
- LRTI48 Roofstar 2 Titanium Lance - Stem 480 mm
- LRTI60 Roofstar 2 Titanium Lance - Stem 600 mm

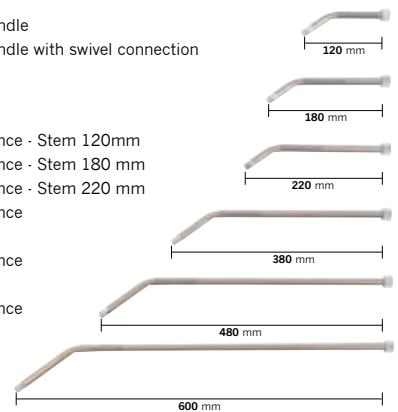

Available accessories

- **Piezoelectric ignition**
Code 1014.AP
- **Swivel connection**
Code 1011.AG
- **Anti-kink hose spring**
Code 1011.MT
- **Rubber hose EN559**
Code 1025.EN
- **Stand**
Code 1011.PP
- **Replacement kit for Roofstar Titanium flow valve**
Code 1011.RK4
- **Professional high pressure LPG regulator with safety valve**
Code 1030.V

SPECIFICATIONS

Roofstar 2 Titanium torch							
Head mm Ø	Size		Caloric output			Max Consumption	
	Stem mm	Weight gr	Kcal/h	Kw	Kj/h	Operating pressure bar	Kg/h (4bar)
50	220	555	64729	75,27	270891	2 - 4	5,400
60	220	572	93498	108,72	391287	2 - 4	7,800
2x50	220	795	95296	110,81	398812	2 - 4	7,950

Piezoelectric ignition 57 gr

Regulator with safety valve

Flow capacity	12 Kg/h
Rated pressure (inlet)	16 bar
Operating pressure (outlet)	max 4 bar
Weight	520 gr
Gases to be used	propane C3 H8 · butane C4 H10