





# PROFY 1 TITANIUM

PROFY 1 TITANIUM

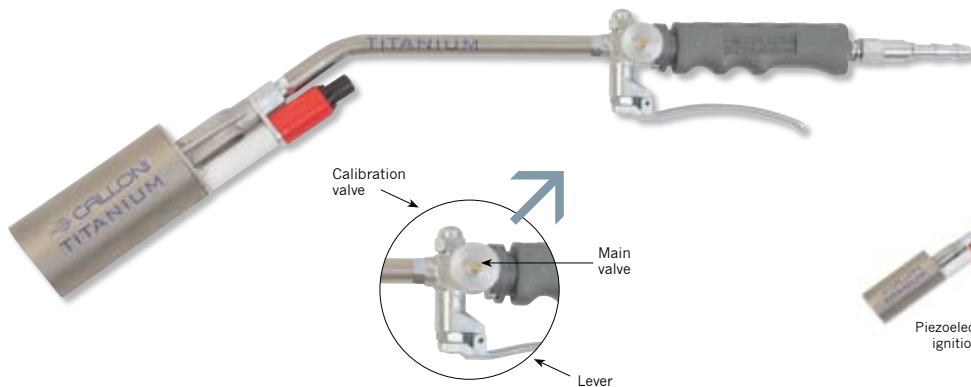

**TITANIUM**  
torch  
30% lighter

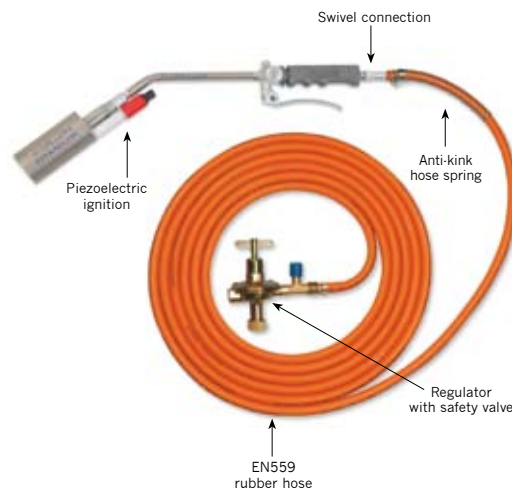

- Profy 1 Titanium is a torch made of ultralight **TITANIUM**. It has been designed by Calloni to lighten the hard and tiring daily work of the waterproofing professionals. In fact, since it is extremely light, it guarantees a considerable reduction of hard work, in particular for long-lasting jobs.
- Lightness, supremacy of performances, accuracy and speed, together with the possibility of customization are the main features of Profy 1 Titanium.
- It has been approved by the TÜV (German Safety Control Authority) and

designed in accordance with DIN standards and EC safety, health and environmental guidelines, also taking into consideration ergonomic factors and noise levels.

- It has a lever, a **CALIBRATION VALVE** which **CONTROLS THE LOW POINT** (to prevent the starting flame from reaching a dangerous length) and a main valve by which the flow of gas can be opened, cut off and regulated.
- The whole range is available both in the standard version and with optional accessories.


## SPARE PARTS AND ACCESSORIES

### ■ Bell heads


#### CODE

- 1014.5TA Ø 50 mm titanium bell head with piezoelectric ignition
- 1014.6TA Ø 60 mm titanium bell head with piezoelectric ignition
- 1014.5DTA 2 x Ø 50 mm titanium double bell head with piezoelectric ignition
- 1014.5T Ø 50 mm titanium bell head
- 1014.6T Ø 60 mm titanium bell head
- 1014.5DT 2 x Ø 50 mm titanium double bell head

#### WITH PIEZOELECTRIC IGNITION

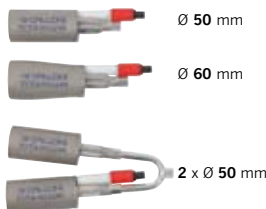


#### WITHOUT PIEZOELECTRIC IGNITION

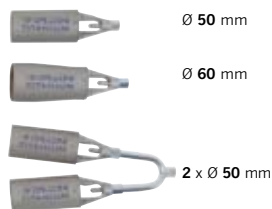

### ■ Profy 1 Titanium Torch (also available with SWIVEL CONNECTION)

- Profy 1 Titanium Torch · Stem 120 mm
- Profy 1 Titanium Torch · Stem 180 mm
- Profy 1 Titanium Torch · Stem 220 mm
- Profy 1 Titanium Torch · Stem 380 mm
- Profy 1 Titanium Torch · Stem 480 mm
- Profy 1 Titanium Torch · Stem 600 mm

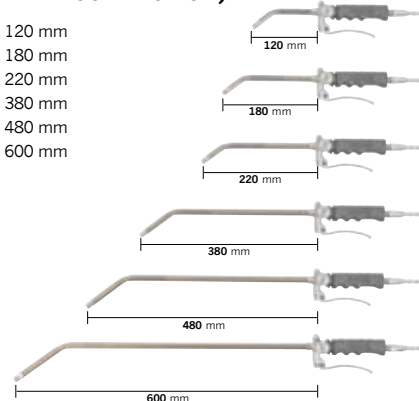

### ■ Available accessories

- **Piezoelectric ignition**  
Code 1014.AP
- **Swivel connection**  
Code 1011.AG
- **Anti-kink hose spring**  
Code 1011.MT
- **Rubber hose EN559**  
Code 1025.EN
- **Stand**  
Code 1011.PP
- **Replacement kit for Profy Titanium flow valve**  
Code 1011.RK5
- **Professional high pressure LPG regulator with safety valve**  
Code 1030.V

## SPECIFICATIONS

Profy 1 Titanium torch							
Size			Caloric output			Max Consumption	
Head mm Ø	Stem mm	Weight gr	Kcal/h	Kw	Kj/h	Operating pressure bar	Kg/h (4bar)
50	220	555	64729	75,27	270891	2 - 4	5,400
60	220	570	93498	108,72	391287	2 - 4	7,800
2x50	220	793	95296	110,81	398812	2 - 4	7,950

Piezoelectric ignition 57 gr

#### Regulator with safety valve

Flow capacity	12 Kg/h
Rated pressure (inlet)	16 bar
Operating pressure (outlet)	max 4 bar
Weight	520 gr
Gases to be used	propane C3 H8 · butane C4 H10